


## SPECIFICATIONS

## Whisper Pak Sound Enclosure – 50Hz

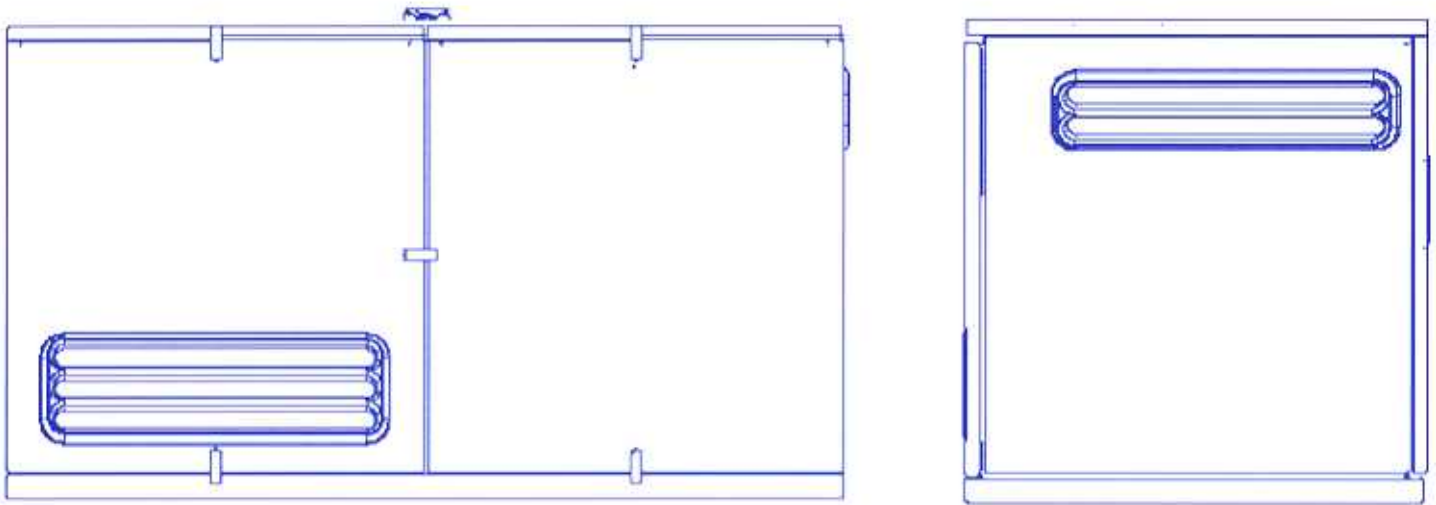

These sound attenuating enclosures for our larger units are constructed of satin finished stainless steel or lightweight powder coated aluminum panels. There is no internal framework. Instead, the individual panels are held together by a system of locating pins and latches as well as a strong, corrosion resistant stainless steel base which receives, locates and aligns the other members of the enclosure. The panels can be easily removed in seconds giving complete, unobstructed access to service the generator set. The panel covering the service side of the engine is specially designed to give immediate access. Customer specified penetrations can be provided at the time of manufacture for exhaust, control wiring and electrical cables as well as fuel and oil lines. For units equipped with a front power take-off, the front panel may also be removed quickly and with a minimum of labor.

- Sound transmission can be further retarded by choosing our double mounting option.
- Metal sound attenuating enclosures for our smaller generator sets not listed in the table below can be custom ordered from the factory.

1 Ø	3 Ø	LENGTH	WIDTH	HEIGHT
30 kWe	35 kWe	1715 mm	794 mm	978 mm
35 & 40 kWe	50 kWe	1791 mm	902 mm	978 mm
48 kWe		1715 mm	1041 mm	1080 mm
	70 & 80 kWe	2286 mm	1041 mm	1080 mm
	99 & 130 kWe	2362 mm	1143 mm	1130 mm